

### Continuous Motion Shrink Bundler

Our ARPAC Brand 45TW Model is a continuous motion tray wrapper capable of wrapping up to 45 products per minute, depending on product size. It's rugged design ensures years of reliable service.

This system will wrap any unitized or tray-packed product, including random pack sizes. It is ideal for wrapping a wide range of products in either a single tier or stacked arrangement.


#### TRAY APPLICATIONS

- Cans
- Plastic bottles
- Jars
- Glass bottles
- Floor tiles
- Plates
- Cartons



#### APPLICATIONS

- Automotive
- Beverage
- Building Supplies
- Consumer Goods
- Contract Packaging
- Food
- Health & Beauty
- Material Handling
- Printing & Publishing

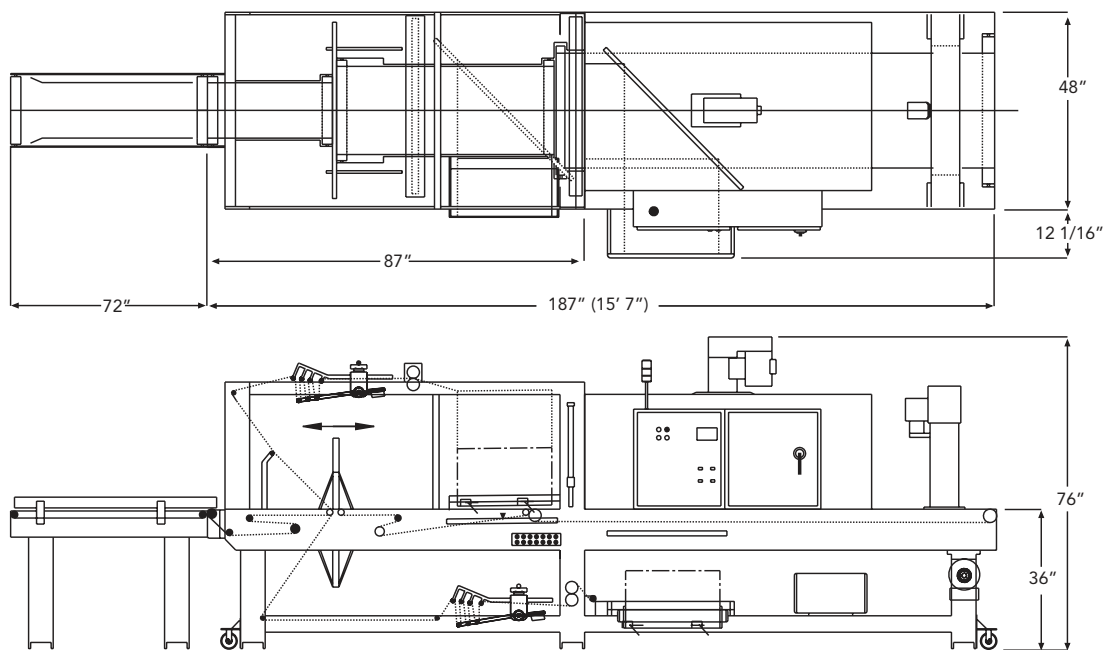

Final layout may vary.

## FEATURES

- Heavy-duty rugged construction designed for high durability and around-the-clock operation
- Laser cut and CNC machined components for maximum precision
- Powder coat finish that provides a durable scratch resistant surface and prevents corrosion
- Allen-Bradley® PanelView 600Plus operator interface with color touchscreen, message display and self-diagnostics
- Digital controls for fast and accurate setup when changing product size and film
- Bypass mode allows product to pass through the machine with out being wrapped and without heating the tunnel
- 6' infeed belt conveyor for product pacing
- Durable Intralox conveyor belts eliminate tracking problems
- Continuous motion telescoping infeed, seal conveyor and carriage for optimum speed and performance
- Manual film splicing bar for quick and easy film changeovers
- 14" diameter side mounted film cradles for easy film loading
- 70" single zone shrink tunnel
- 3-way cooling feature at the tunnel exit for immediate product handling
- NEMA 12 electrical cabinet and controls
- Central point lubrication simplifies preventive maintenance
- Low film alert warns that a film changeover will soon be necessary

## OPTIONS

- Casters for machine portability
- Quick-change seal frame cylinder kit for higher speeds
- Jib crane to assist with film loading
- Dual film cradle for quick film changeover
- 20" film roll diameter capacity
- Alternate voltages available 208 VAC, 220 VAC, 575 VAC
- Print registration - top film only
- Seal gap bridge, roller or telescoping for product 3" - 6" L

## SPECIFICATIONS

\* Specifications and product sizes may vary, depending upon the application

- Up to 45 packages per minute
- 460 VAC, 3 Ph, 60 Hz, 48 A, 38 kW
- 80 psi, 30 SCFM
- Product Range: 6" to 18" W, 6" to 15" L, 2" to 12" H

## FILM

- Max. film width: 27" single-wound
- Clear or randomly printed
- Max. film roll diameter: 14" with a 3" core
- Max. film gauge: 4 mil.