

Continuous Motion Shrink Wrapper

Our ARPAC Brand AL model continuous motion shrink wrapper excels in a wide variety of applications. This machine is designed to increase productivity, reduce wear and tear on parts, and eliminate the waste of time and energy by using a continuous motion design with smooth, fast, and unbroken flow. With its superior design, the AL is more reliable, requires less maintenance, uses less film and energy, and provides superior film tension for a better, more consistent package. The AL series is available in both a traditional cross-seal or a top-seal orientation to accommodate a wide range of products.



Direct Drives



Optional Compact Dual Roll
Powered Centerfolder




Optional Adjustable Perforator
with Brush Roller

APPLICATIONS

- Automotive
- Beverage
- Building Supplies
- Consumer Goods
- Contract Packaging
- Food
- Health & Beauty
- Material Handling
- Printing & Publishing

AL30-B CONTINUOUS MOTION SIDE SEAL WRAPPER

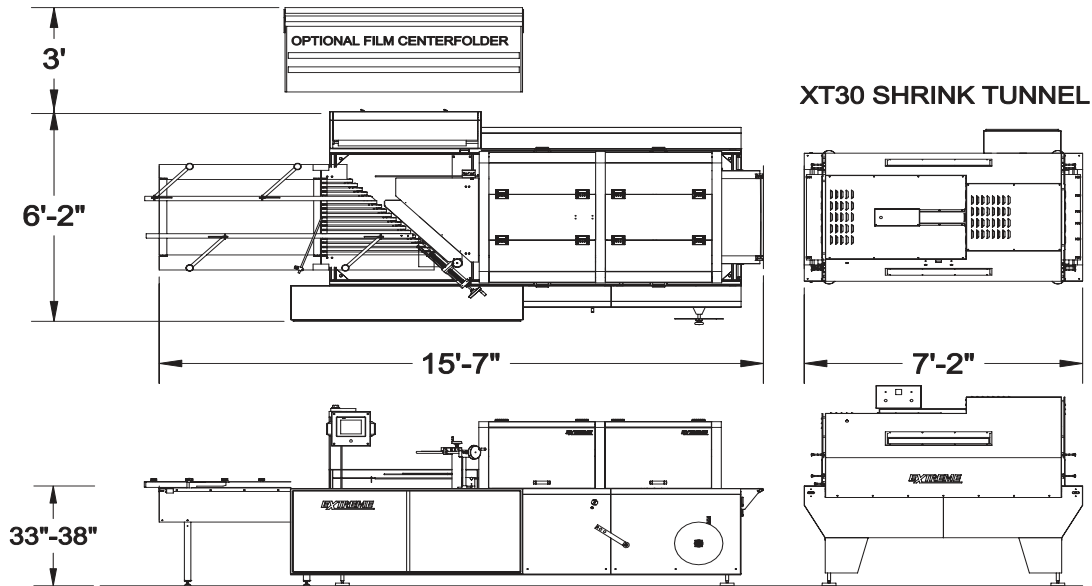

Final layout may vary.

SPECIFICATIONS

- Pneumatic cross seal and seal carriage
- Servo controlled NextGen Seal with overload and wrap sensor technology
- Electronic film bunching at seal relieves film tension between products resulting in consistently stronger seals
- Low height film rack holds double length centerfolded rolls of film up to 16" diameter
- Powered selvage winder with dancer bar control and film break detection
- Tool-free changeover
- Electronic jam protection at seal
- Inclinometers at film unwind and selvage winder replaces potentiometers
- Direct driven conveyor sections eliminates maintenance
- Product range: 2" to 30" W (AL Model), 2" to 12" W (TAL Model), 2" to Infinite L, 0.25" to 12" H
- Up to 60 packages per minute
- Film speed: Up to 100 feet per minute
- Package rate: Up to 60 per minute
- Electrical power: 240/480 VAC, 3 Ph, 60 HZ, 30 A
- Compressed air requirements: 4 SCFM @ 80 PSI

OPTIONS

- Category 3 safety circuitry and risk assessment documentation
- Standard or custom infeeds for almost any application
- Heavy duty caster kit
- Powered product bypass
- Single or dual roll film centerfolders

FILM

- 45 - 90 gauge polyolefin
- 1 - 4 mil low density polyethylene
- Film width up to 78" flat or 38" centerfolded (AL Model)